



Channel 17

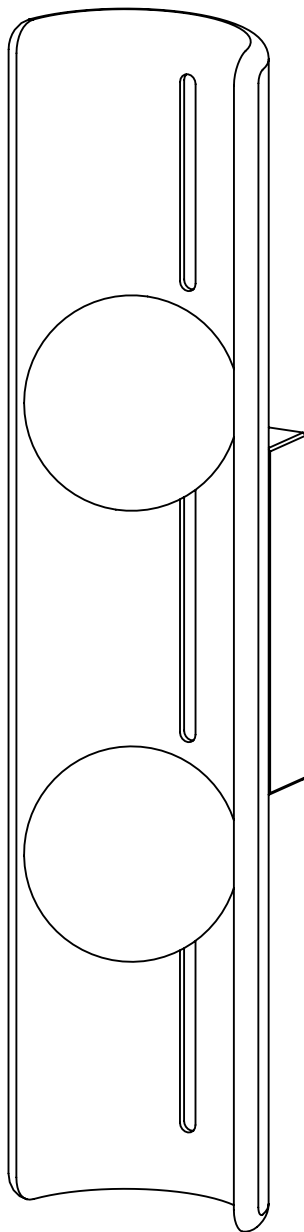


Channel 17 Contents


Remove all parts from box onto a clean, soft surface and inspect for defects or damage.

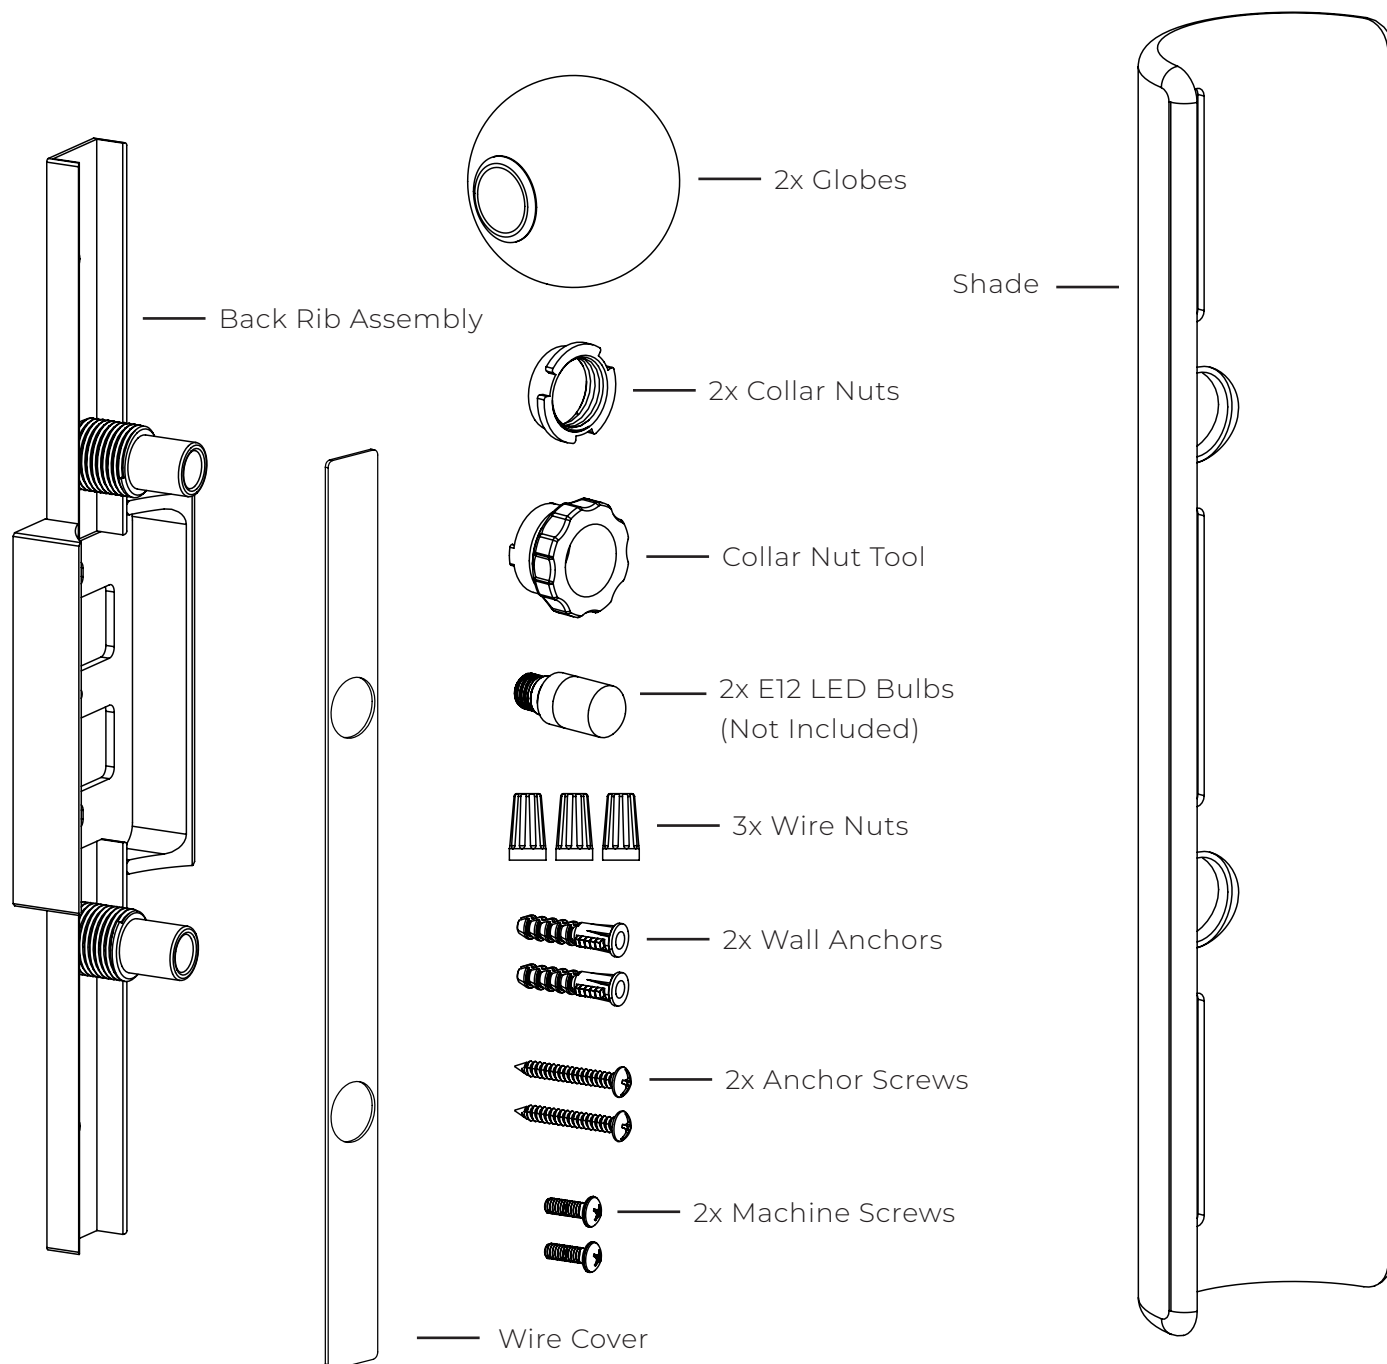

1. Use the back rib assembly as a template to install the 2x wall anchors into the wall.
2. Hold the back rib assembly close to the wall and connect the fixture ground wire to the wall ground wire.
3. Connect the +/- fixture wires to the +/- wall wires. Tuck all wires into the j-box.
4. Mount the back rib assembly to the j-box with the 2x machine screws and to the wall anchors with the 2x anchor screws.

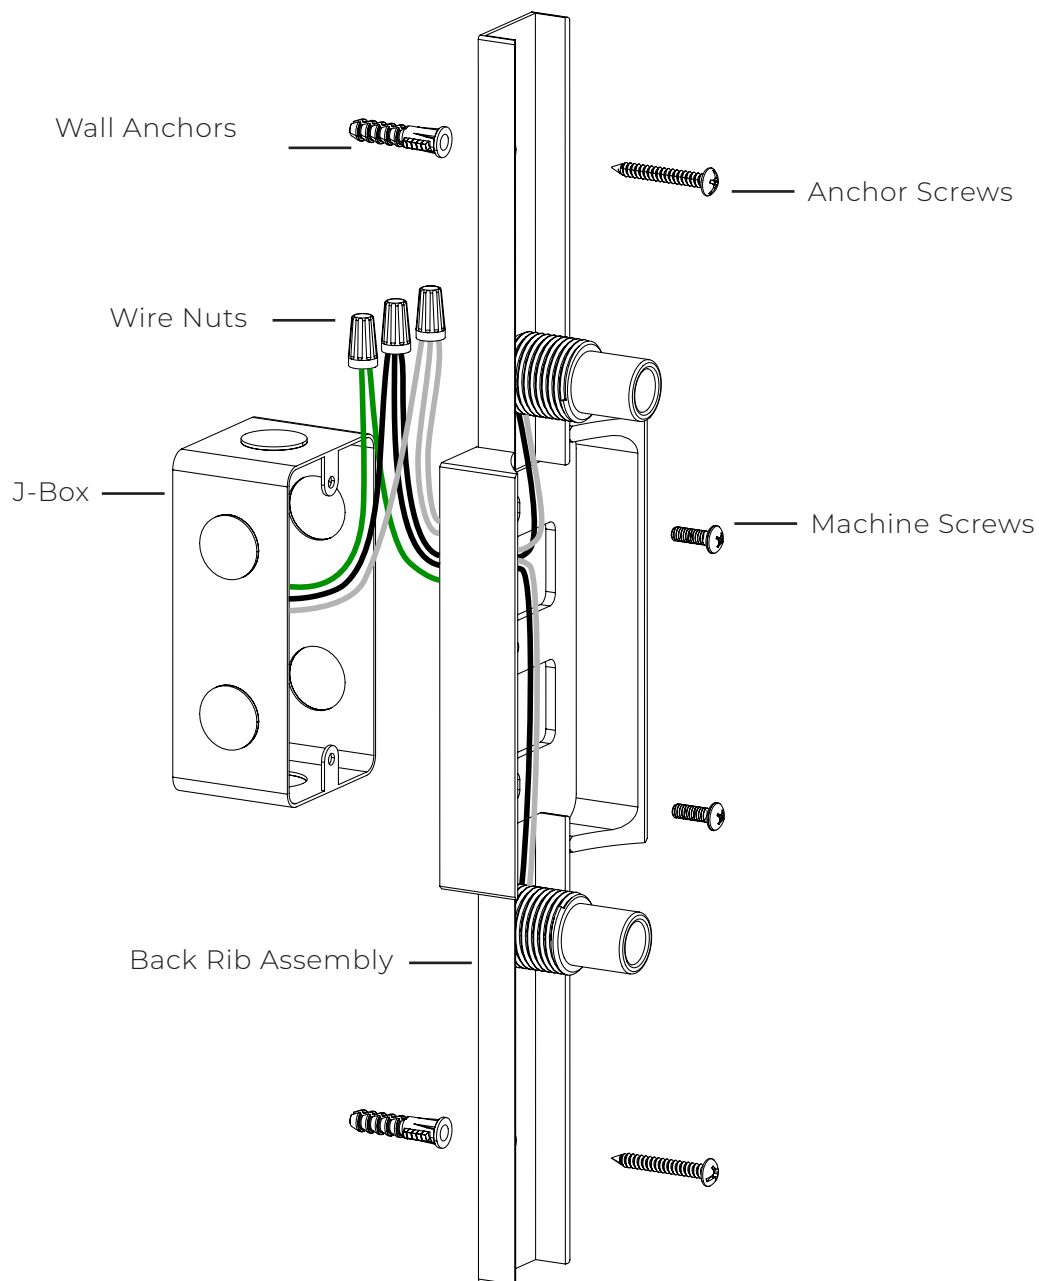

5. Align the holes in the wire cover with the sockets, then slide the cover onto the back rib assembly.
6. Slide the shade onto the back rib assembly so that the sockets pass through the holes in the shade.
7. Thread the 2x collar nuts onto the 2x sockets. Use the collar nut tool to tighten.

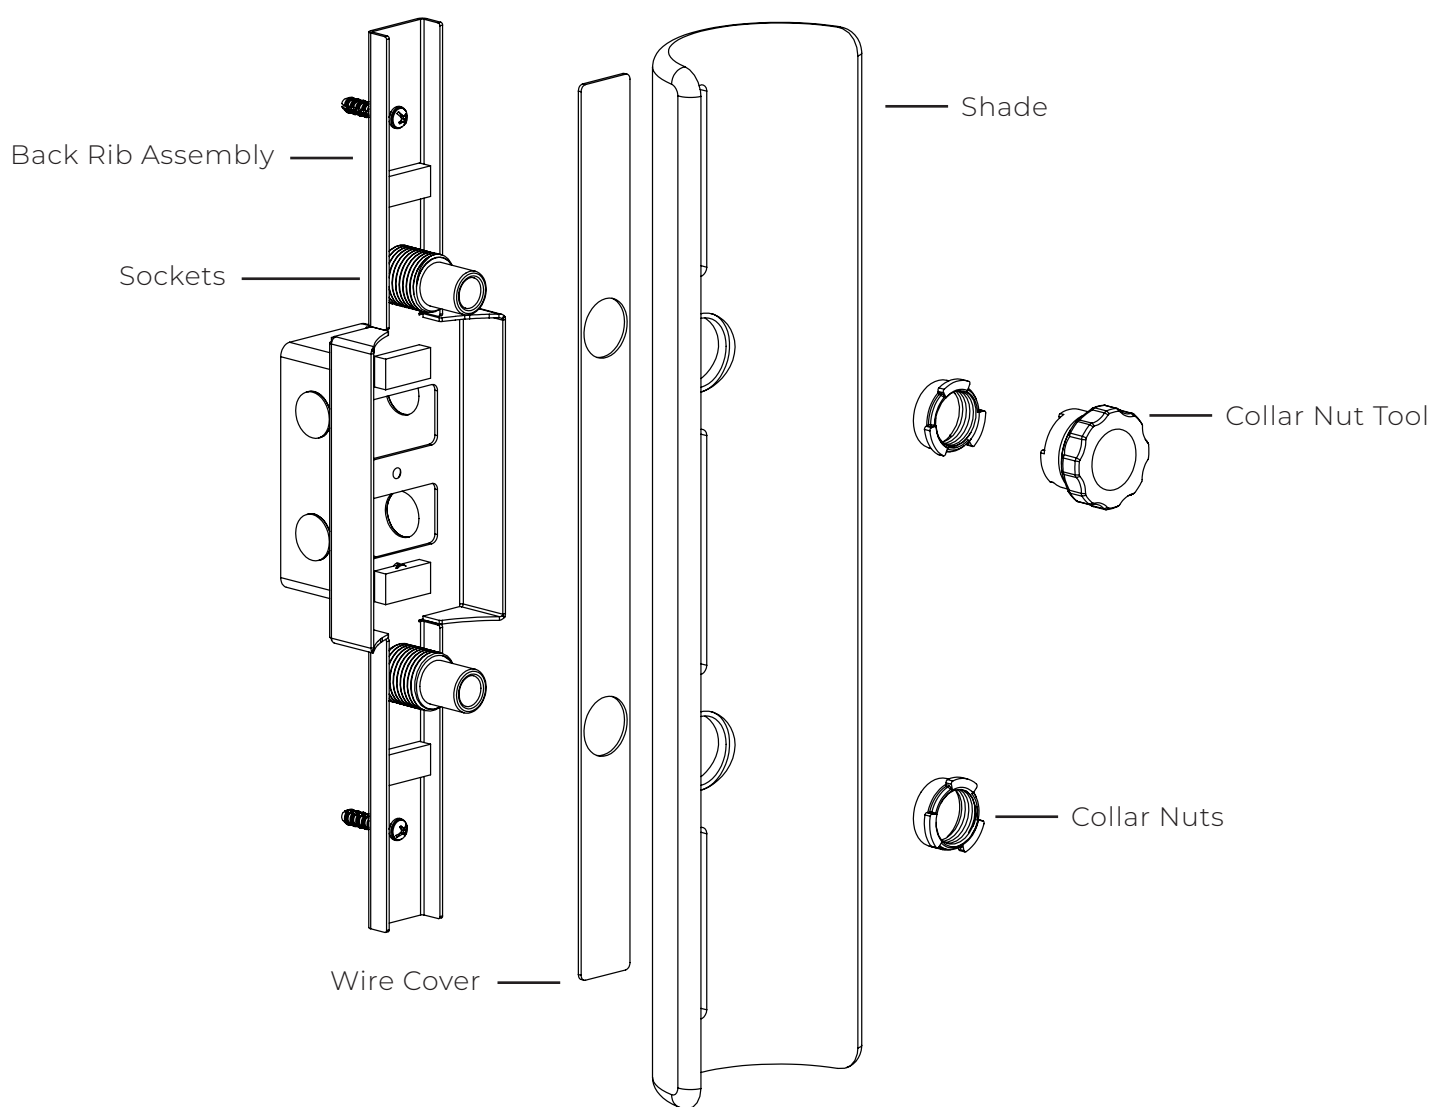

8. Thread the 2x bulbs into the sockets.
9. Thread the 2x globes onto the sockets.

