



## **Pillar**



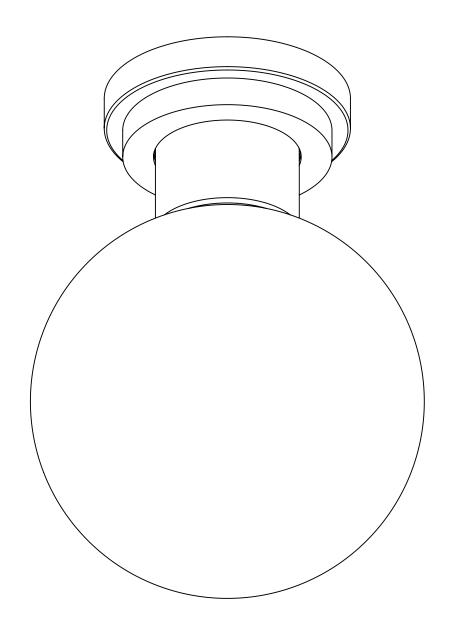


## **Pillar Contents**


Remove all parts from box onto a clean, soft surface and inspect for defects or damage.

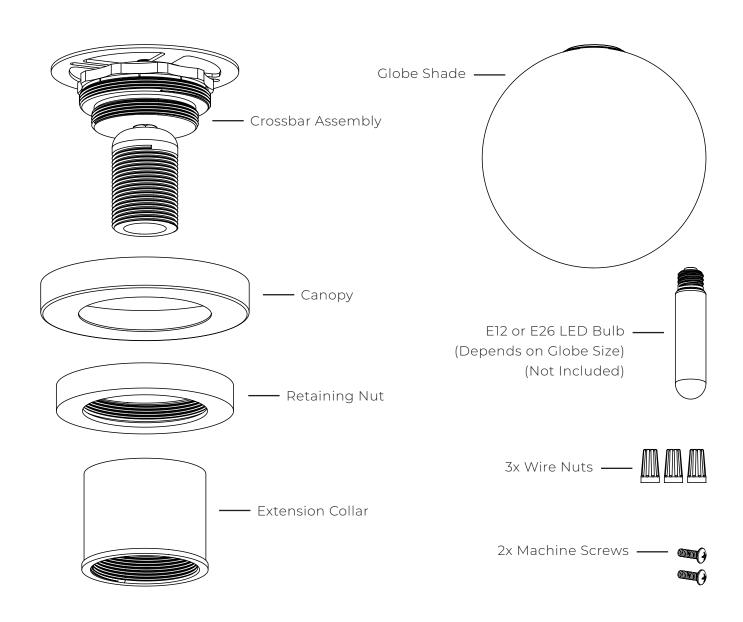

- 1. Connect the fixture ground wire to the ceiling ground wire. Connect the +/- fixture wires to the +/- ceiling wires. Tuck all wires inside the j-box.
- 2. Mount the crossbar assembly to the j-box using the 2x machine screws.

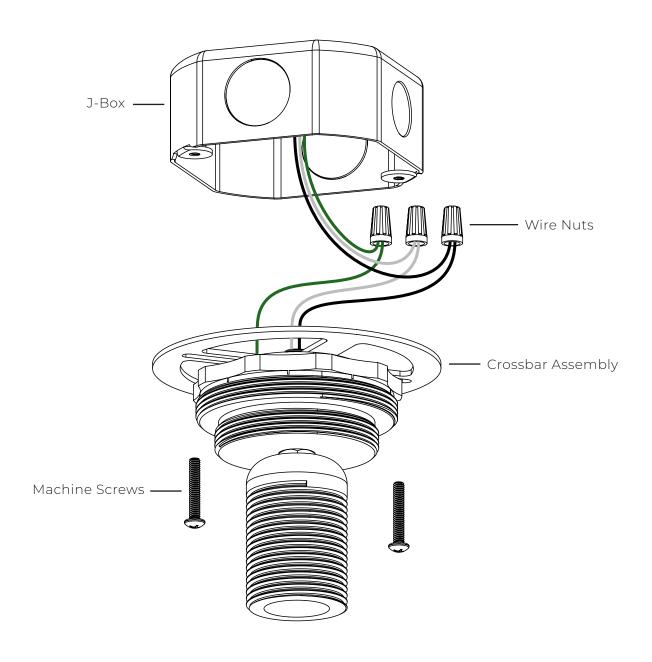

- 3. Slide the canopy over the crossbar assembly until it is flush with the ceiling. Thread the retaining nut onto the crossbar assembly to secure the canopy in place.
- 4. Thread the extension collar onto the crossbar assembly, with the lip facing downwards.

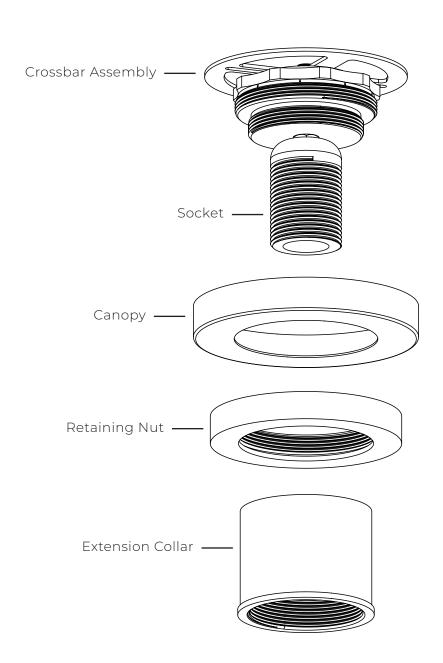

- 5. Thread the bulb into the socket.
- 6. Thread the globe shade onto the socket.

