



## **Pulley**

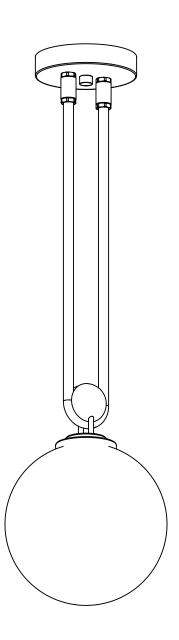


## **Pulley Contents**

Remove all parts from box onto a clean, soft surface and inspect for defects or damage.

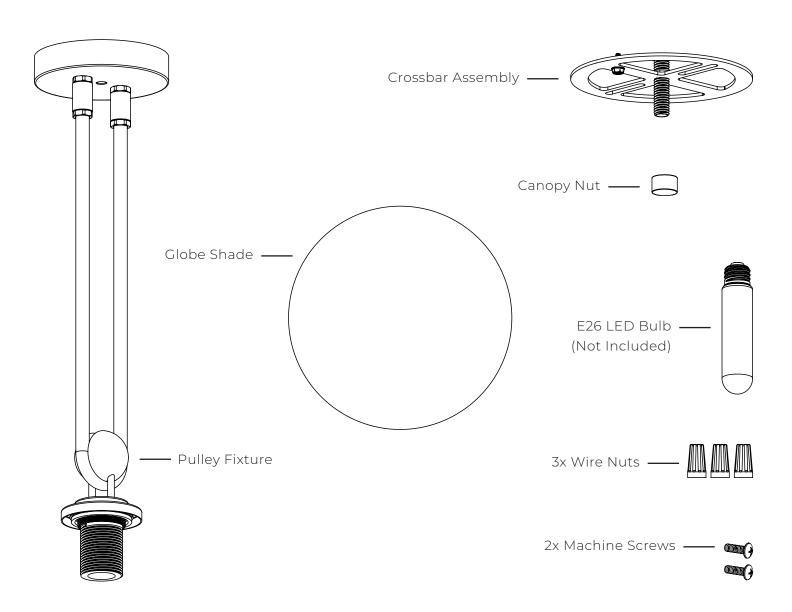

- 1. Connect the fixture ground wire to the ceiling ground wire. Mount the crossbar to the j-box using the 2x machine screws.
- 2. Connect the +/- fixture wires to the +/- ceiling wires. Tuck the wires into the canopy.
- 3. Slide the canopy over the nipple on the crossbar assembly and attach by threading on the canopy nut until tight.

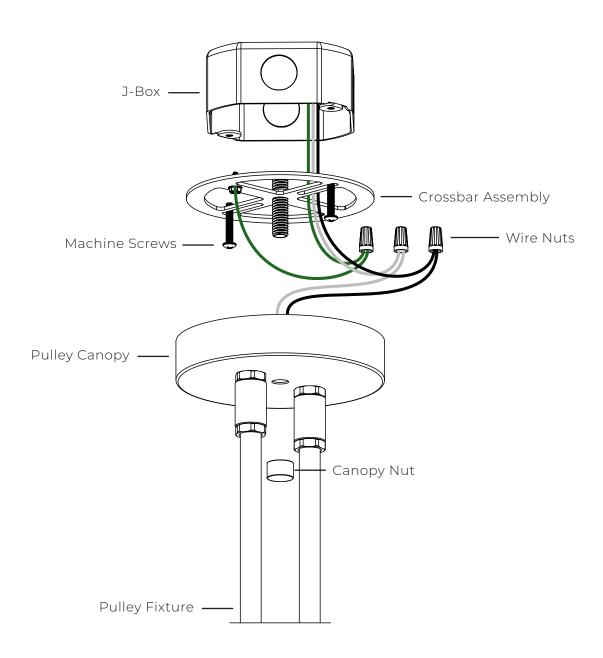

- 4. Thread the bulb into the socket.
- 5. Thread the globe shade onto the socket.

