



Porto Flush Mount

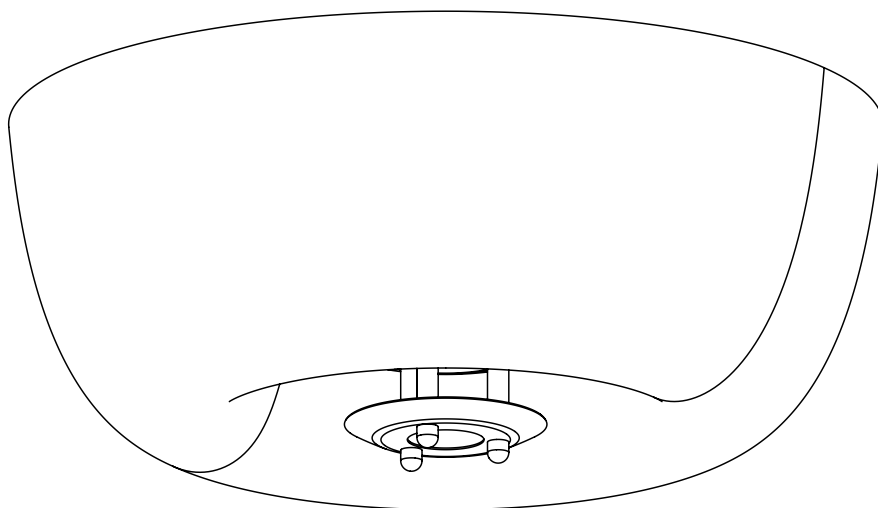


Porto Flush Mount Contents

Remove all parts from box onto a clean, soft surface and inspect for defects or damage.

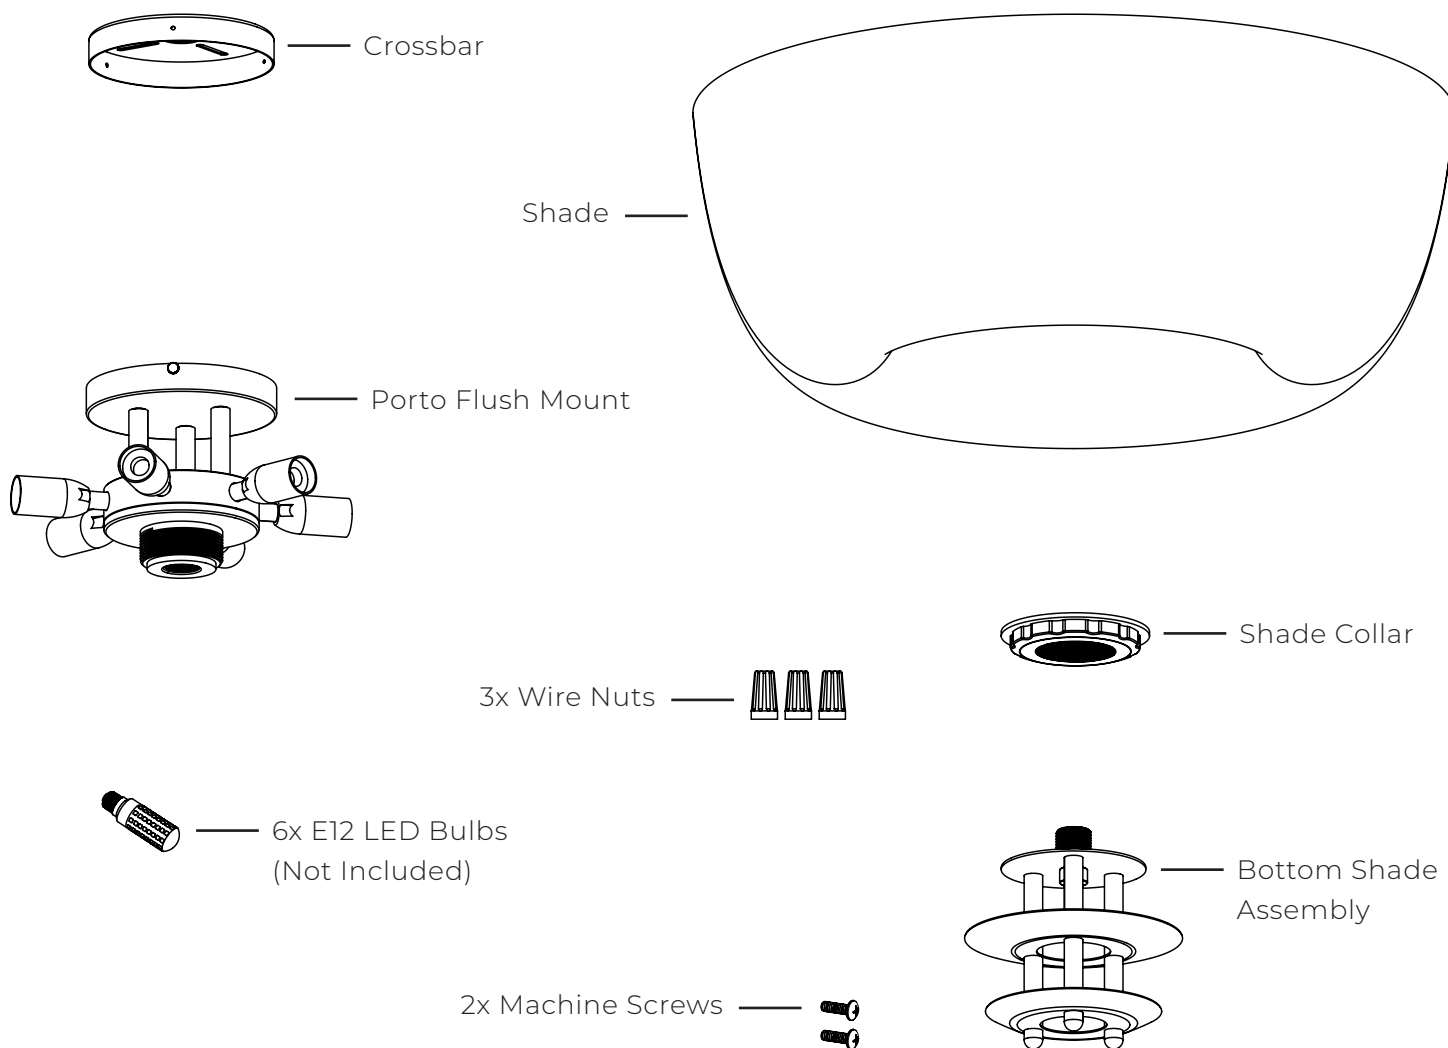


1. Mount the crossbar to the j-box using the 2x machine screws, making sure to pull the ceiling wires through to be accessible.

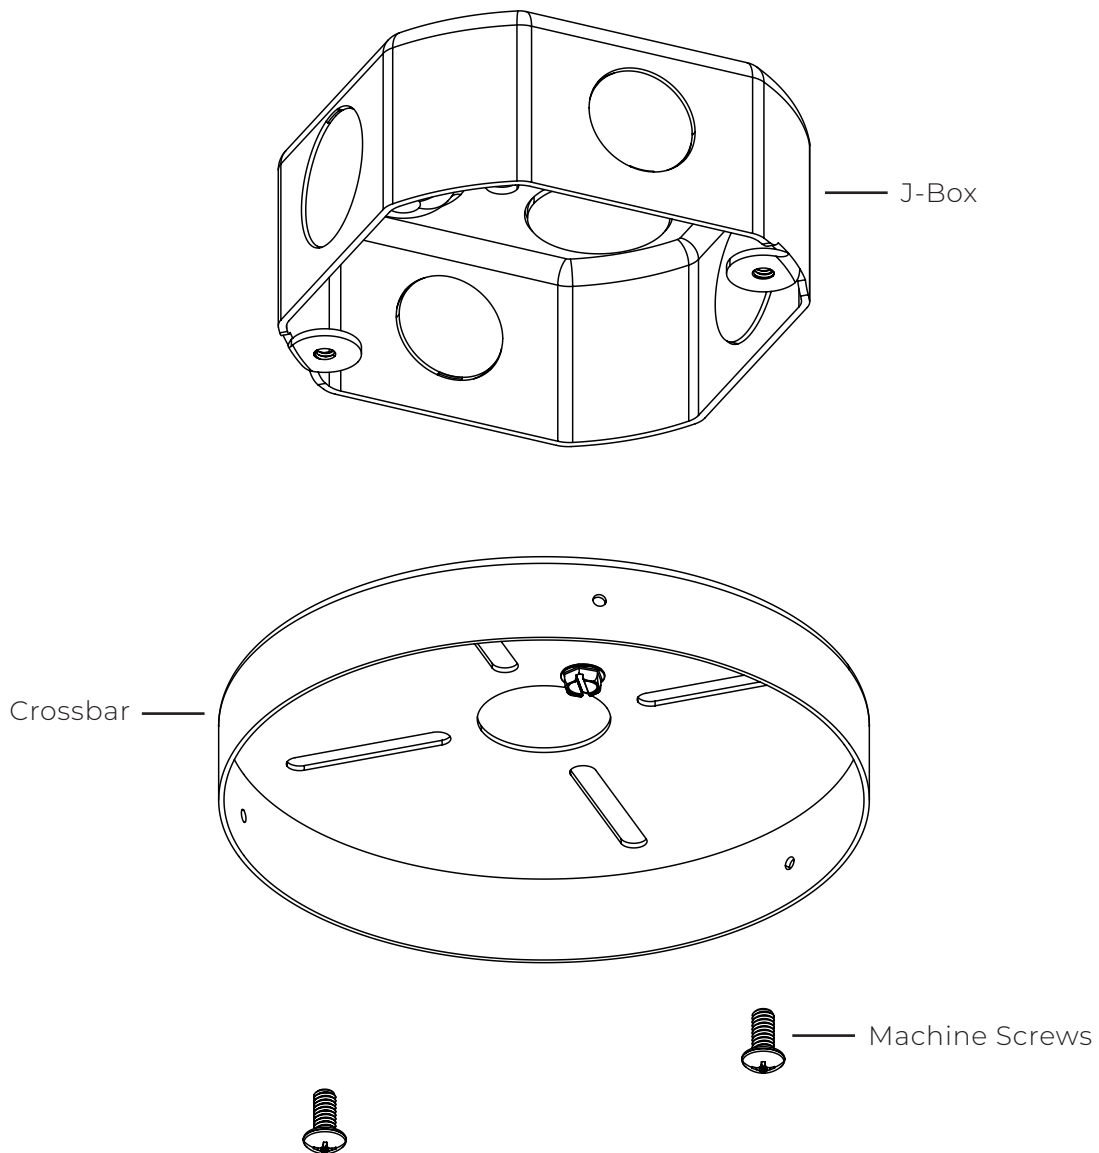


2. Connect the fixture ground wire to the ceiling ground wire. Connect the +/- fixture wires to the +/- ceiling wires.

3. Slide the Porto Flush Mount over the crossbar and connect with the 3x thumb screws from the sides, making sure to tuck the wires and wire nuts inside.

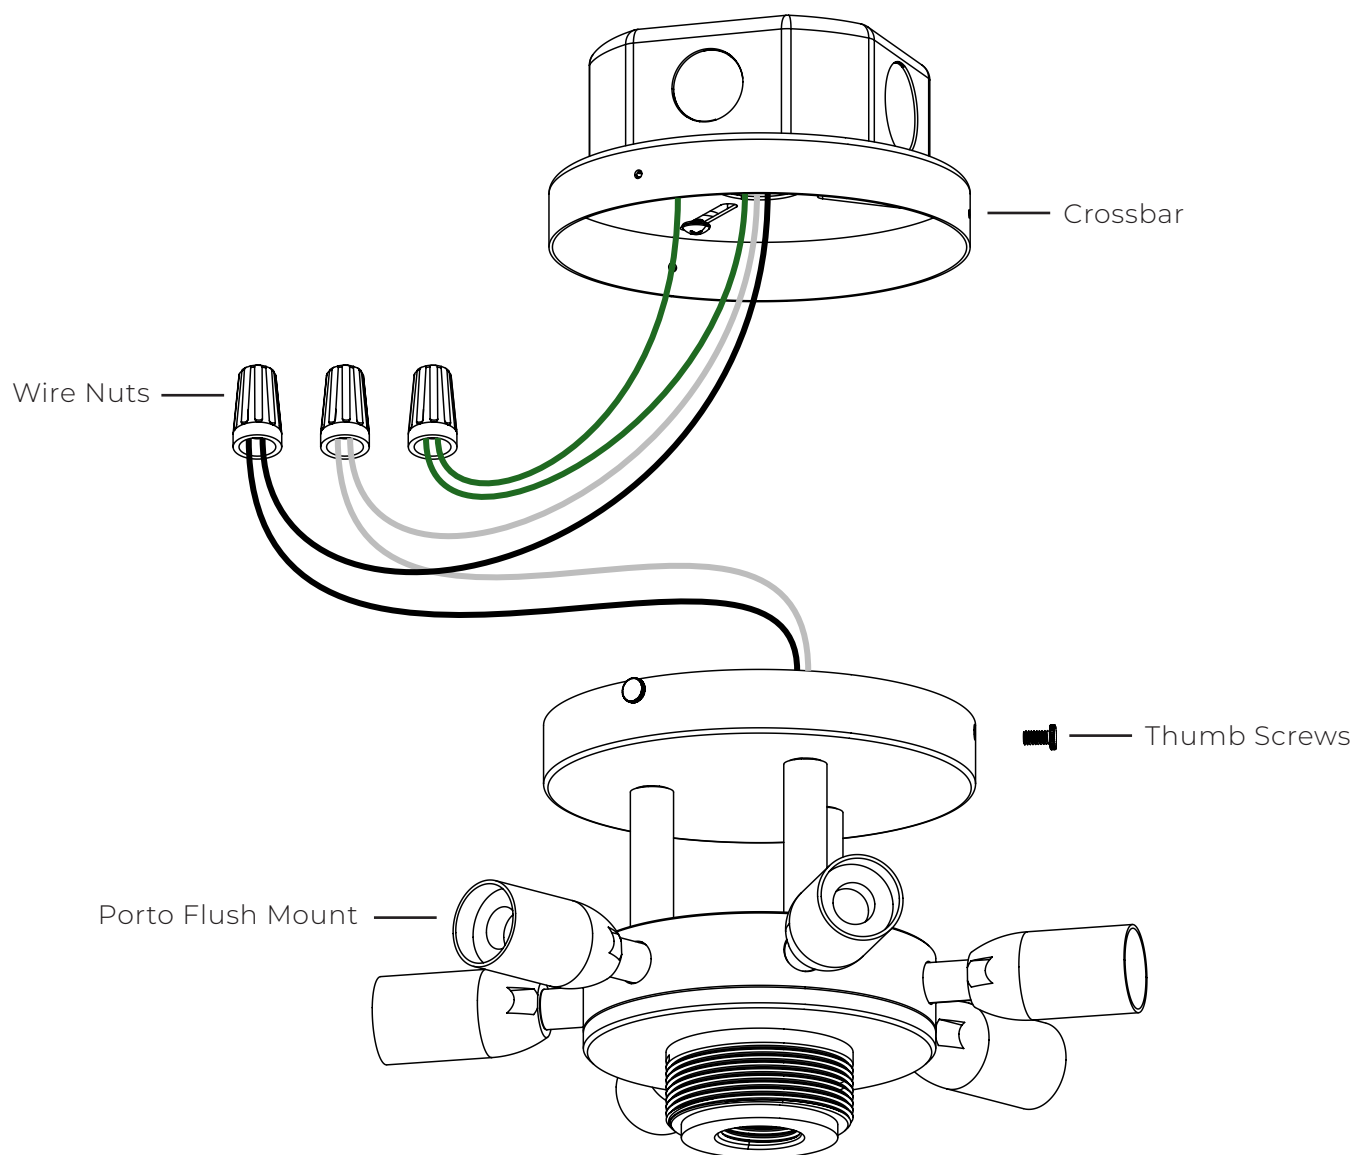

4. Thread the 6x E12 LED bulbs (not included) into the 6x sockets.
5. Slide the shade up over the fixture and tighten in place by threading on the shade collar.

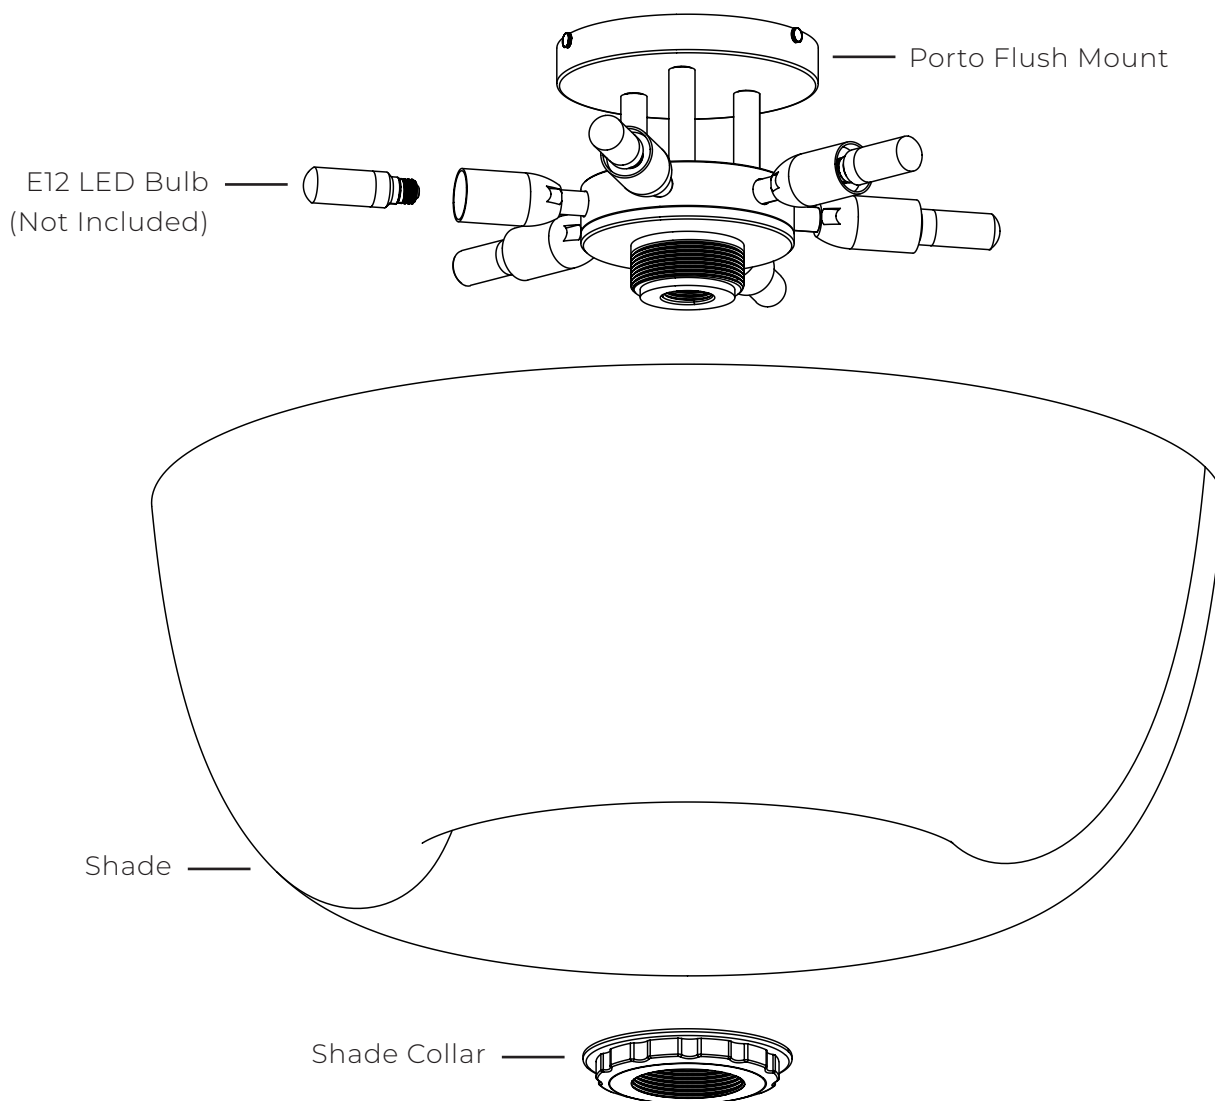

6. Thread the bottom shade assembly into the shade collar until tight.

